


**Emergency Ballasts or Centralized Inverter**


11-Emerg Ballast or  
Centralized Inverter  
23 Nov 16

20,000 Square Foot - Open Floor Plan - Utility Fail

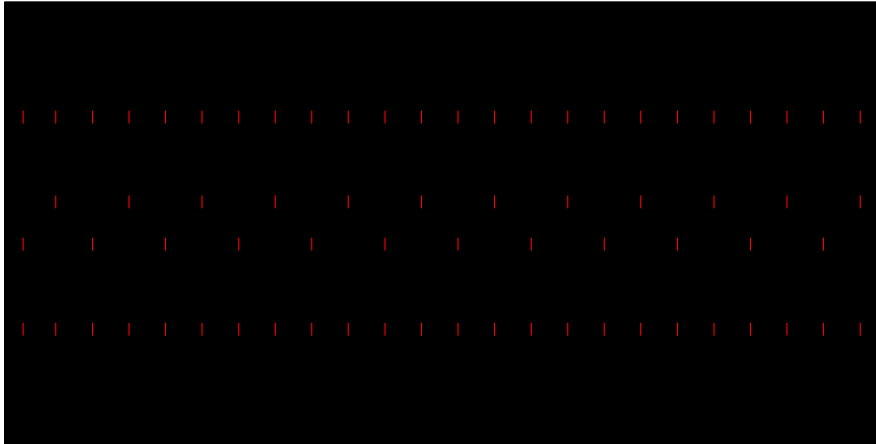

1 Foot Candle Average = Qty 72, 1400 Lumen Fluorescent Battery Pack w/ SD Module

20,000 Square Foot - Open Floor Plan - Utility Fail

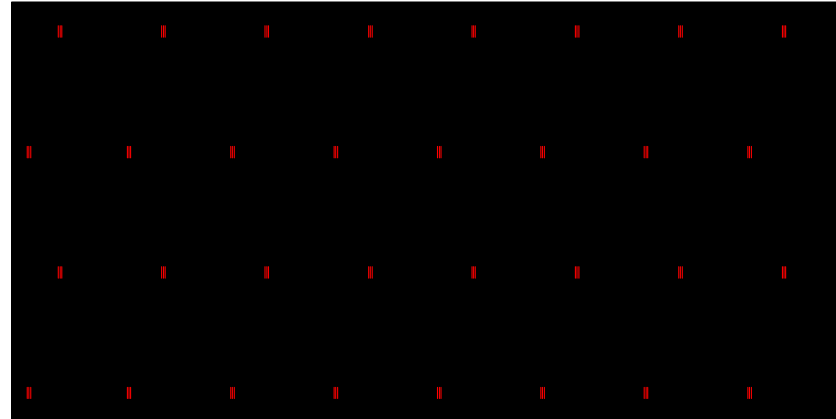

1 Foot Candle Average = 4.2kW Centralized Lighting Inverter

**TYPICAL BUDGETARY EXPENSE W/ INSTALLATION = \$ 22,240.00**

QTY: 72, Self Diagnostic Emergency Ballasts, \$267.00 each.....installed = \$20,304.00  
QTY: 20, Battery Back Up Exit Sign, \$65.00 each..... installed = \$1,600.00  
QTY: 2, Battery Pack (6V / 30W) \$110.00 each..... installed = \$250.00  
QTY: 2, Outdoor Lamp (6V / 30W) \$ 28.00 each.....installed = \$86.00

SELF-TESTING  
 AUTOMATIC MONTHLY NFPA 101; RESULTS NOT AUTOMATICALLY LOGGED.  
 NOT CAPABLE OF PERFORMING REQUIRED ANNUAL NFPA 101 TESTING

**TYPICAL BUDGETARY EXPENSE W/ INSTALLATION = \$ 19,725.00**

QTY: (1) 4.2kW Lighting Inverter with Intellistat, (3) ZoneSaver-2's, E-Mail NFPA 101 test results, E-Mail service required .....installed = \$18,215.00  
QTY: 20, AC Exit Signs \$50.00 each..... installed = \$1,300.00  
QTY: 2, 70W / HID wall packs \$90.00 each..... installed = \$210.00

**Connected loads:**  
**(32) 32W / 3 lamp fluorescents, (20) AC Exit Signs, (2) 70W / HID wall packs = ~3,900W**

SELF-TESTING & SELF-DIAGNOSTIC  
 AUTOMATIC MONTHLY NFPA 101; RESULTS AUTOMATICALLY LOGGED (2 years)  
 AUTOMATIC ANNUAL NFPA 101; RESULTS AUTOMATICALLY LOGGED (2 years)  
 AUTOMATIC E-MAIL NFPA 101 REPORT (Pass / Fail – Time, Date Stamp)  
 AUTOMATIC E-MAIL "SERVICE REQUIRED" (E-Mail sent to select service provider)